

# LP12

Light and reliable platform with electric lifting



## LIFTING PLATFORM

The LP mobile platform allows to operate safely up to 5 meters with a maximum load of 120 kg. Equipped with 4 steering wheels with central locking system and 2 stabilizers, the unit is extremely lightweight thanks to the aluminum construction. The ergonomic design and the small size allow easy transport into the van and the workplace.



## LIGHTWEIGHT

The construction of the cage, mast and frame in aluminum together with the possibility to remove the ballast allow an easy product handling thanks to the extremely low weight.



## COMPACT DESIGN

The reduced overall product size and the ergonomic handles make the lifting platform easy to be carried through doors and elevators.




## SAFETY

The 4 heavy-duty castors with polyurethane ring are equipped with a central locking system easy to be operated through the dedicated foot pedal. The bubble surface level shows the operator the correct platform positioning.



## REMOVABLE BALLAST

The 4 ballast lower the platform center of gravity during the operation and are equipped with a fast disconnecting system to reduce the weight during the transport.

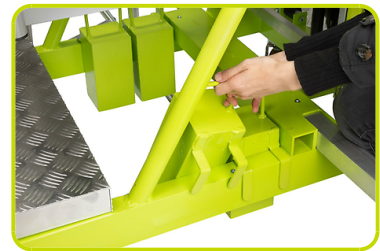

## OPERATOR CONTROL PANEL

Control Panel with key, lift / lowering control and emergency stop button offer an IP 54 protection for outdoor uses.



## BATTERY COMPARTMENT

The step is made of heavy-duty aluminum corrugated sheet that contains gel battery, on-board battery charger, main switch, emergency button, and a button to lower the cage.



## STABILIZERS

Once positioned in the working area, stability is guaranteed by installing the special lateral stabilizers that the machine is equipped with.



## Description

Material		Aluminum made
Lift		Electric
Drive		Manual
Load capacity	Kg	120
Removable ballast		4 x 15 kg
Self-closing door		Yes

## Weight

Service weight (with/without ballasts)	Kg	150/90
--	----	--------

## Tyres/Chassis


Tyres (Front/Rear)		PU/PU
Wheels, number front, rear (x=drive wheels)	n.	2/2
Central locking system		Yes
Stabilizers	n.	2

## Dimensions

Max platform height	m	3
Overall dimensions	cm	70 x 118 x 195

## ELECTRIC ENGINE

Battery		Gel
Battery voltage/nominal capacity	V/Ah	12/39 C20
Built-in charger		Yes
Electric actuator	N	1700
Gas spring	N	1500

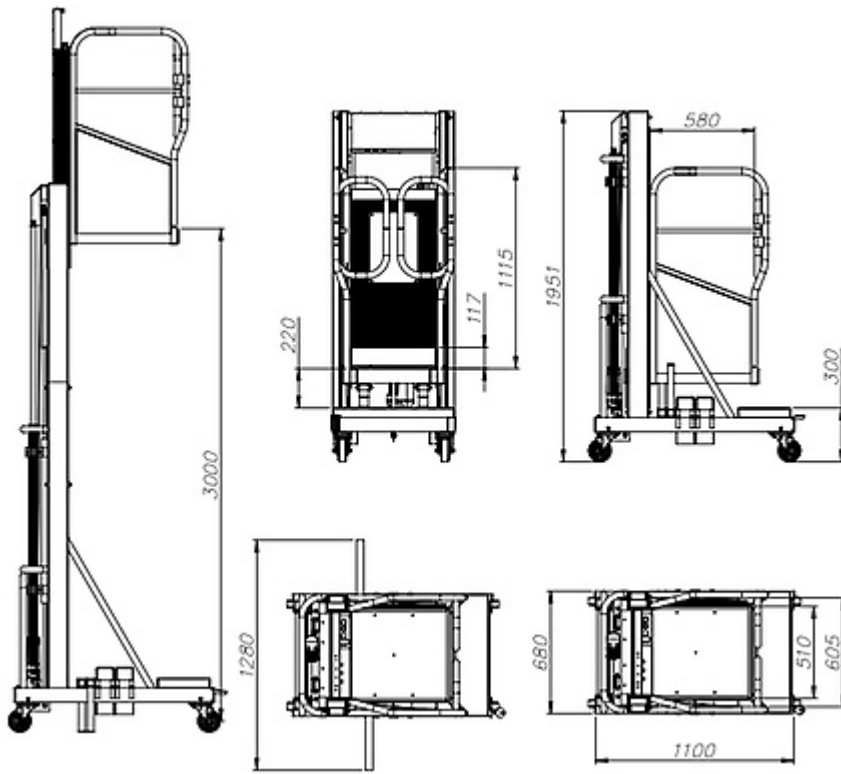

The information is aligned with the Data file at the time of download.  
Printed on 15/05/2024 (ID 13449)

©2024 | PR Industrial S.r.l unipersonale - Loc. Il Piano - 53031 Casole d'Elsa (SI) - ITALY.  
Company subject to the management and coordination of Generac Power Systems Inc. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

